
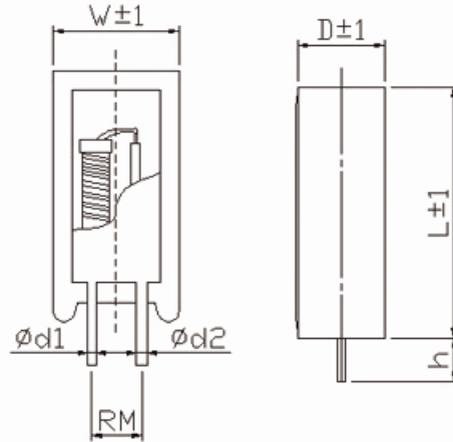


RXF

瓷外壳温度熔断线绕电阻器 5W-10W

Porcelain Housing Temperature Fused Wire Wound Resistors 5W-10W

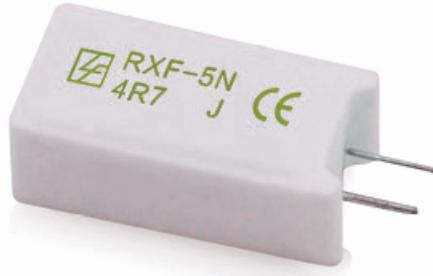

产品特点 · Features

- 01 高温负荷特性优良
Excellent high temperature load performance
- 02 高过载能力
High over loading ability
- 03 可提供安装套件 (选购件)
Assembly and fittings (available)

应用范围 · Applications

- 01 电力分配, 负荷测试
Electric power distribution, load test
- 02 用于电源等回路的限流、均流或取样检测
Applied for current limited current balance or sampling for testing
- 03 适用于功率电源
Ideal for functional power supply
- 04 变频电源等领域
Inverter power supply etc

执行的产品标准 · Reference standards

- GB/T5729-2003 / IEC60115-1:2001

主要检验项目、检验方法及性能要求
Main inspection items, methods & requirements

见 83 页

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	外形尺寸 Dimensions (mm)						
		w±1	D±1	L±1.5	RM _{L1} ⁺²	h	φd1(Ry 引出端子 Ry terminal)	φd2(F 引出端子 F terminal)
RXF	5	13	9	25	5	4.5	0.8±0.1	0.6±0.1
	7	13	9	38	5	4.5	0.8±0.1	
	10	16	12	35	7.5	4.5	0.8±0.1	

订货示例 How to order

产品型号 Type	瓷壳尺寸 / 动作温度 Power Temp. control	标称阻值 Nominal value	精度 Tolerance
RXF	7A	51R	±5%